


# IFC-BOXJ4125

Intel® Celeron® Quad Core processor  
Fanless Industrial Computer



## Features :


- ◇ All aluminum structure, fanless design;
- ◇ Onboard Intel Celeron J4125 Quad Core processor;
- ◇ Support 2\*Intel i211-AT 1000M LAN;
- ◇ Support 1\*M.2 Slot, 1\*Mini PCIE Slot;
- ◇ Support WIFI/3G/4G (Three choose one)
- ◇ Support 6\*COM, COM1 Support RS485;
- ◇ Support OS:



## Specification

Model	IFC-BOXJ4125
Color	Black (Color can be customized)
Material	High-quality all aluminum, surface anodic oxidation
Processor	Onboard Intel Celeron J4125 (Quad core quad threading, 4MB Cache, 2.0GHz, Turbo frequency 2.7GHz)
CPU Architecture	Gemini Lake Refresh
RAM	Support 1*DDR4 2400MHz SODIMM Memory Slot, Max. Support 8GB
BIOS	AMI UEFI BIOS
Display Chip	Integrated Intel UHD Graphics 600
Display Port	1*HDMI, 1*VGA (Support synchronous and asynchronous dual display, Max Resolution support 4096x2160 @ 30Hz)
Front I/O	4*USB2.0, 1*Power Switch, 1*COM
Rear I/O	1*DC, 1*VGA, 1*HDMI, 2*USB3.0, 2*1000M LAN, 1*MIC, 1*SPK 5*COM
Expansion Slot	Support 1*M.2 2280 M-key Slot (Support SATA Protocol) Support 1*Mini PCIE Slot (4G/WIFI/BT Optional, Embedded SIM slot) Optional Ports: GPIO、4*USB2.0、PS/2、LPT
Network	2*Intel i211-AT 10/100/1000M Ethernet LAN
Storage	1*M.2 2280 Slot, 1*2.5" SATA
Input Voltage	DC 9~36V Input
Other Function	Auto power on when there is electricity、Wake on LAN、PXE boot
Work Temp	0°C - +50°C (Commercial HDD), -20°C - +60°C (Industrial SSD), Surface air flow
Work Humidity	0% - 95% non-condensing
Certificates	CE、CCC、FCC Class A、ROHS
Dimension	234 * 200 * 54 mm
Net Weight	2.0kg
Application	Industrial Automation, Medical, Logistics Transportation, Warehouse, Electronic Education etc.

# IFC-BOXJ4125 Drawing

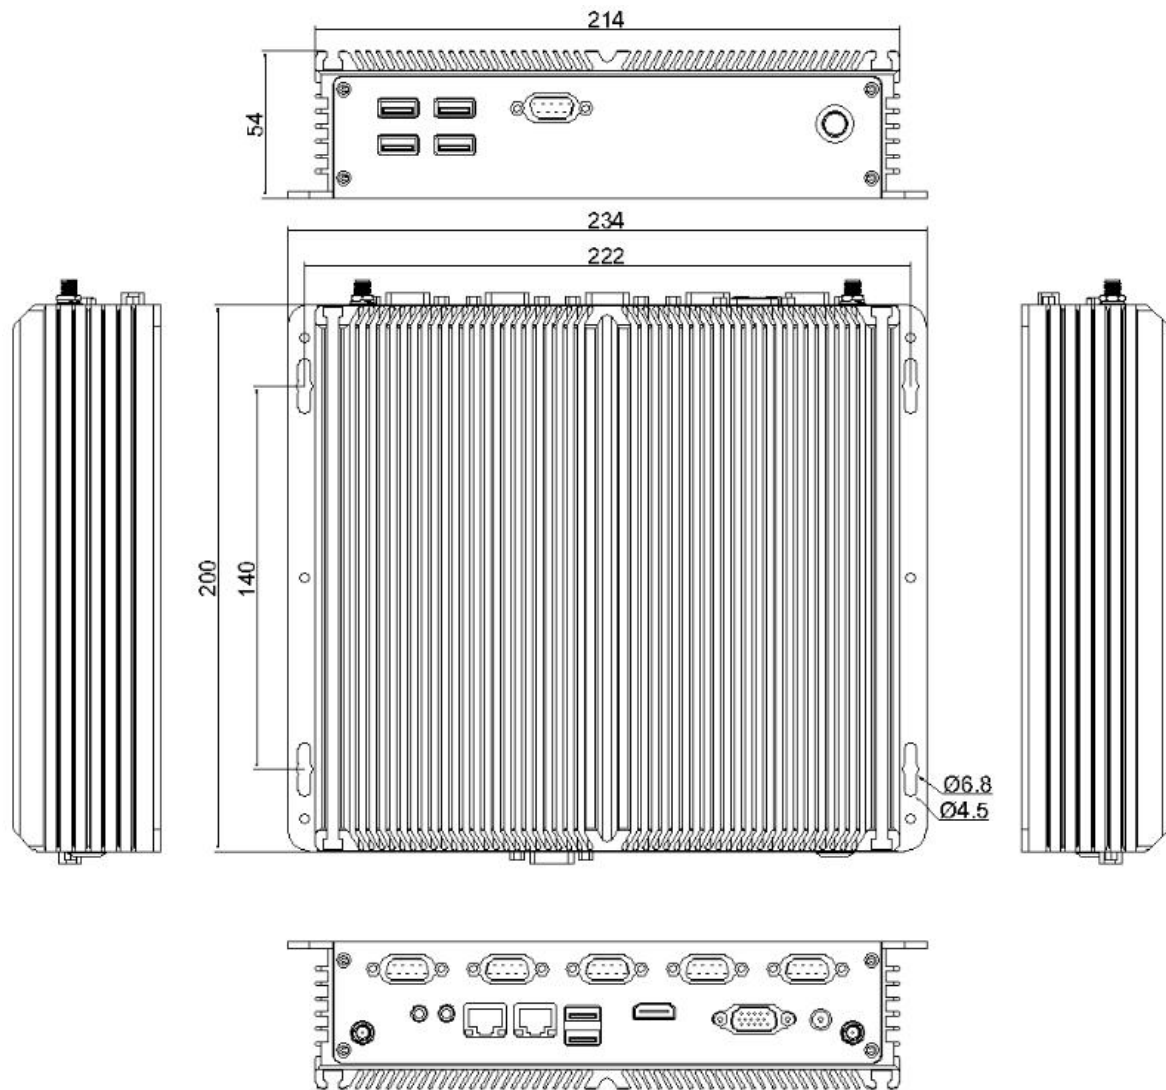

## Accessories List

Name	Quantity	Specification
Power Adapter	1	Power Cord 12V 4A/5A
Power Cord	1	Optional (China, US, EU, UK etc.)

## Order Information

Configuration 1	IFC-BOXJ4125	Intel Celeron J4125	Standard Ports
-----------------	--------------	---------------------	----------------