



**Features:**

1. Fully enclosed design, the whole monitor is dustproof.
2. Front bezel aluminum alloy brushed metal craft, seamless design, front panel IP65 waterproof.
3. Aluminum alloy shell, good mechanical properties, excellent heat dissipation.
4. Adopt multi-points PCAP touch panel, high sensitive and fast-response. Covered with 2mm tempered glass for vandalproof.
5. High performance mainboard, 7x24 continuous operation.
6. VGA+HDMI+DVI interfaces, USB for touch.
7. 12-36V wide voltage support.
8. Anti-interference.
9. Ultra-thin front bezel 3mm, ideal for embedded mounting.

**LCD panel**

Panel size	23.8"
Resolution	1920*1080
Aspect ratio	16:9
Support Color	16.7M colors
Brightness (cd/m <sup>2</sup> )	300
Contrast ratio	1000:1
View angle	89°/89°/89°/89° (R/L/U/D)

**Touch panel**

Touchscreen Type	Project Capacitive Touch (10 points )
Surface Hardness	7H
Luminousness	90%
Touch Interface	USB (RS232 optional)
Touch response time	2ms
Working Life	> 50 million times
Touch options	(5 wires restive touch optional)

**Signal Ports**

VGA	1x VGA
DVI	1x DVI
HDMI	1x HDMI
Audio in/out	Optional

## OSD

OSD control	Brightness, contrast ratio, auto adjustment, H/V position, language select, etc.
Support languages	English, French, Spanish, Portuguese, Italian, German, Russian, Japanese, Chinese, etc.
Support OS	Windows XP, Windows /7/8/10, Linux, Mac OS X, Android, ect.

## Power Supply

External Power Supply	AC 100-240V, 50-60Hz
Working voltage	DC 12V-36V
Power consumption	≤30W

## Enclosure

Material	Aluminum Alloy
Color	Black, Silver
VESA mounting	75x75mm/100x100mm
IP grade	Front panel IP65 waterproof

## Operating Environment


Temperature Range	Operating: -10 to 60°C, Storage: -20 to 70°C
Relative humidity	Operating: 10% to 80%, Storage: 5% to 90%

## Packing Details

Net weight	8.5kg
Gross weight	10kg
Product Dimension	60.6*37.6*6.7cm
Packing size	68*45*17cm
Accessories	Power adapter, HDMI cable, USB touch cable, embedded screws, user manual, warranty card

## Other

Mounting	Embedded mounting screws
	Wall mounting brackets (Optional)
	Desk stand holder (Optional)
Warranty	1 year warranty
Certificates	CE, FCC, RoHS

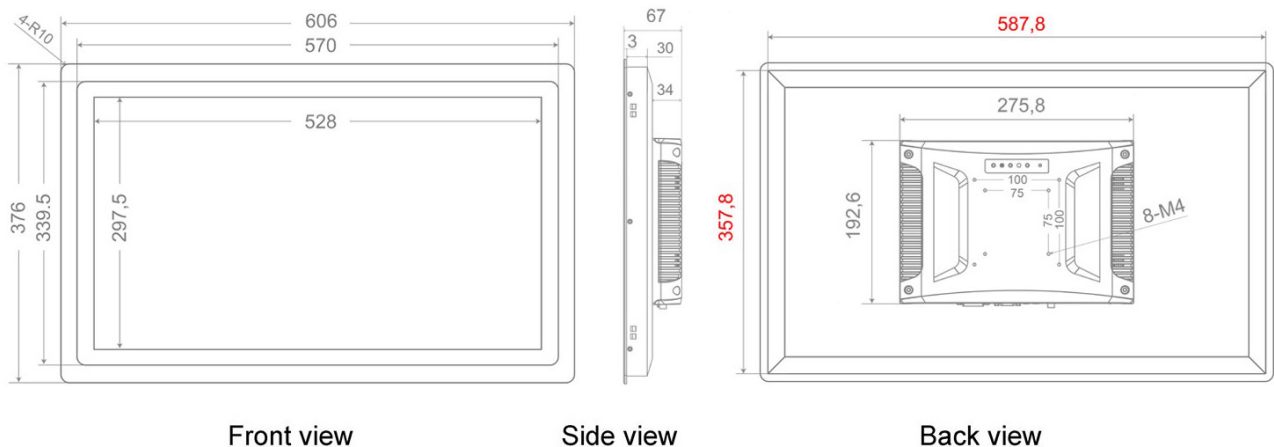

Front view

Side view

Back view