



16*GE Copper Unmanaged Industrial PoE Ethernet Switch

Size: 148*51*165 mm, DIN Rail-mounted

Overview

MES-1316 is an unmanaged Industrial Ethernet Switch, that supports 16 Gigabit Copper ports. It also supports Ethernet Layer 2 protocols required for industrial field applications to ensure the stability of communication networks. This series of switches features low power consumption and a fanless design, ensuring noise-free operation. They are designed to operate in a wide temperature range from -25°C to +75°C and exhibit excellent electromagnetic compatibility (EMC) performance. This ensures that they can operate reliably in harsh industrial environments. These switches provide a secure and reliable solution for building fast and stable network terminal access networks in various industrial applications such as new energy, industrial automation, intelligent transportation, video surveillance, and more.

Features

- ✧ Using high quality integrated module to provide good electrical characteristics
- ✧ Reliable data transmission and long life span
- ✧ Support for full-duplex or half-duplex mode, with automatic negotiation capability
- ✧ The network port supports fully automatic cross identification
- ✧ Internal storage and forwarding mechanism, support multiple protocols
- ✧ In line with the industrial-grade operating standards, MBTF in more than 300,000 hours
- ✧ Working power supply: DC48V, dual power redundancy, providing reverse polarity protection, short circuit protection, over voltage protection
- ✧ Wide operating temperature: -25~+75°C


Specifications

Standards	IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE 802.3z, IEEE 802.3x, 802.3at, 802.3at
Business Ports	Copper ports: 16* 10/100Base-T/1000Base-TX(2 groups of 2*4 10/1000/1000M RJ45), self adaptive RJ45 ports, full/half duplex mode, Auto MDI/ MDI-X connection
	Power Ports: supports DC dual power, dual power redundancy(6-contact 5.08mm spacing terminal block)
Transmission Distance	Twisted pair: 10BASE-T: Cat3, 4, 5 UTP cables(≤250 m) 100/1000BASE-T(X): Cat5 or later UTP cables(≤100 m)
Switch Property	Backplane bandwidth: 52G (no blocking)
	Processing type: store and forward (full wire speed)
	Throughput: 38.688Mpps
	Jumbo frames: support 10KBytes
	MAC table size: 8k Buffer: 4.1Mbit data frames
LED Indicators	Power indicator: PWR(green light), Copper indicators for ports as follows:
	Gigabit copper ports, Yellow light on is in Link/Act status, yellow light off is in link-down status.
	Yellow light on & blinking is in link-up, sending and receiving data. Green light on is for 1000M, green light off is for 10M or 100M.
Anti static electricity	Ethernet ports: common mode 6KV/differential mode 2KV Power ports: common mode 6KV/differential mode 4KV
	Contact: 4KV, air: 8KV
Industrial Standards	EMI: FCC Part 15 Subpart B Class A, EN 61000-6-4 (Industrial)
	EMS:
	IEC 61000-4-2 (ESD), Level 4
	IEC 61000-4-3 (RFS), Level 3
	IEC 61000-4-4 (EFT), Level 4
	IEC 61000-4-5 (Surge), Level 4
	IEC 61000-4-6 (CS), Level 3 IEC 61000-4-8
Shock:IEC 60068-2-27 Free Fall: IEC 60068-2-32 Vibration: IEC 60068-2-6	
Power Supply	Accessing terminal: 6-contact 5.08mm spacing terminal block
	Input voltage: DC48V
	Input current: max. 2A
	Standby power: < 1W; full load system power: < 65W
	PoE output budget: max. 100W
	Supports dual power redundancy Supports polarity reverse protection
Working Environment	Operating temperature: -25~+75°C
	Storage temperature:-40~85°C
	Operating humidity: 5%~95%(non condensing)

Mechanical Features	Shell: aluminum
	IP rating: IP40
	Installation methods: DIN-rail mounting
	Weight: 0.6kg
	Size: 148mm*51mm*165mm
Warranty Period	3 years

Outlook and Dimension

Size: 148mm(L)*51mm(W)*165mm(H)

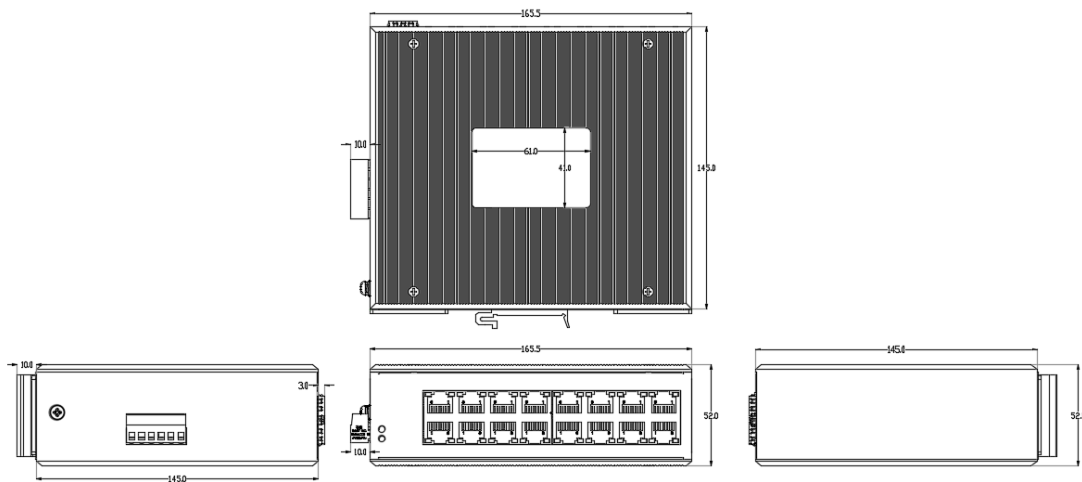

Ordering Information

Model	Description
X61016P	16-port Gigabit unmanaged industrial PoE Ethernet switch 16*10/ 100/1000M RJ45 PoE copper ports Unmanaged industrial type Supports PoE+ Input voltage: DC48V Operating temperature: -25°C~+75°C Aluminum shell Size: 148mm*51mm*165mm Protection level: IP40 DIN-rail mounting